


Cabeza de rótula hembra PHSB

Características:
• Marca: GIM (G)
• Marca: IKO (I)



(pulg)



Código	Número	Cuerda	Peso	d	Rosca class 3B														Diam. bola inch	Cap. dinámica de carga básica		Precio
					Dimensiones pulg (mm)															CD lbf	CD lbf	
					S	D	B	B1	d1	L	I	L1	L2	W	D1	D2	r					
13PHSB3—IK	(I)	PHSB-3	Derecha	14 g	0.1900 (4.826)	0.1900 -32UNF (15.88)	0.625 (6.35)	0.250 (7.92)	0.312 (7.77)	0.306 (34.93)	1.375 (4.75)	0.187 (26.97)	1.062 (14.27)	0.562 (7.92)	0.312 (7.92)	0.406 (10.31)	0.12 (0.3)	7/16 (11.112)	780	2090	\$502.28	
13PHSB4—IK	(I)	PHSB-4	Derecha	23 g	0.2500 (6.350)	0.2500 -28UNF (19.05)	0.750 (7.14)	0.281 (9.53)	0.375 (9.02)	0.355 (42.85)	1.687 (4.75)	0.187 (33.32)	1.312 (19.05)	0.375 (9.53)	0.375 (11.89)	0.468 (0.5)	0.20 (13.097)	1030	3040	\$491.84		
13PHSB4D—TA	(G)	PHSB-4	Derecha	23 g																\$102.08		
13PHSB4I—TA	(G)	PHSB-4	Izquierda																	\$102.08		
13PHSB5—IK	(I)	PHSB-5	Derecha	36 g	0.3125 (7.938)	0.3125 -24UNF (22.23)	0.875 (8.74)	0.437 (11.10)	0.447 (11.35)	1.812 (46.02)	0.187 (4.75)	1.375 (34.93)	0.750 (19.05)	0.437 (11.10)	0.437 (11.10)	0.500 (12.70)	0.20 (0.5)	5/8 (15.875)	1530	3800	\$303.92	
13PHSB5D—TA	(G)	PHSB-5	Derecha	36 g																\$105.56		
13PHSB5I—TA	(G)	PHSB-5	Izquierda																	\$105.56		
13PHSB6—IK	(I)	PHSB-6	Derecha	59 g	0.3750 (9.525)	0.3750 -24UNF (25.40)	1.000 (10.31)	0.406 (12.70)	0.500 (13.13)	2.125 (53.98)	0.250 (6.35)	1.625 (41.28)	0.937 (23.80)	0.562 (14.27)	0.562 (14.27)	0.687 (17.45)	0.20 (0.5)	23/32 (18.256)	2080	4980	\$506.92	
13PHSB6D—TA	(G)	PHSB-6	Derecha	59 g																\$132.24		
13PHSB6I—TA	(G)	PHSB-6	Izquierda																	\$132.24		
13PHSB7—IK	(I)	PHSB-7	Derecha	82 g	0.4375 (11.112)	0.4375 -20UNF (28.58)	1.125 (11.10)	0.437 (14.27)	0.562 (14.88)	2.375 (60.33)	0.250 (6.35)	1.812 (26.97)	1.062 (15.88)	0.625 (15.88)	0.625 (15.88)	0.750 (19.05)	0.20 (0.5)	13/16 (20.638)	2520	6020	\$639.16	
13PHSB7D—TA	(G)	PHSB-7	Derecha	82 g																\$129.92		
13PHSB7I—TA	(G)	PHSB-7	Izquierda																	\$146.16		
13PHSB8—IK	(I)	PHSB-8	Derecha	132 g	0.5000 (12.700)	0.5000 -20UNF (33.32)	1.312 (12.70)	0.500 (15.88)	0.625 (17.73)	2.781 (70.64)	0.250 (6.35)	2.125 (53.98)	1.187 (30.15)	0.750 (19.05)	0.750 (19.05)	0.875 (22.23)	0.20 (0.5)	15/16 (28.575)	3330	8370	\$776.04	
13PHSB8D—TA	(G)	PHSB-8	Derecha	132 g																\$190.24		
13PHSB8I—TA	(G)	PHSB-8	Izquierda																	\$190.24		
13PHSB10—IK	(I)	PHSB-10	Derecha	191 g	0.6250 (15.875)	0.6250 -18UNF (38.10)	1.500 (14.27)	0.562 (19.05)	0.750 (21.31)	3.250 (82.55)	0.312 (7.92)	2.500 (63.50)	1.500 (38.10)	0.875 (22.23)	0.875 (22.23)	1.000 (25.40)	0.20 (0.5)	1.1/8 (28.575)	4500	9050	\$923.36	
13PHSB10D—TA	(G)	PHSB-10	Derecha	191 g																\$276.08		
13PHSB10I—TA	(G)	PHSB-10	Izquierda																	\$229.68		
13PHSB12—IK	(I)	PHSB-12	Derecha	286 g	0.7500 (19.050)	0.7500 -16UNF (44.45)	1.750 (17.45)	0.687 (22.23)	0.875 (24.84)	3.750 (95.25)	0.312 (7.92)	2.875 (73.03)	1.750 (44.45)	1.000 (25.40)	1.000 (25.40)	1.125 (28.58)	0.20 (0.5)	1.5/16 (33.338)	6410	12700	\$1,387.36	
13PHSB12D—TA	(G)	PHSB-12	Derecha	286 g																\$538.24		
13PHSB12I—TA	(G)	PHSB-12	Izquierda																	\$284.20		
13PHSB16D25TA	(G)	PHSB-16	Derecha	998 g	1.0000 (25.400)	1.0000 -12UNF (69.85)	2.750 (25.40)	1.000 (34.93)	1.375 (32.23)	1.269 (139.70)	0.436 (11.07)	4.125 (104.78)	2.125 (53.98)	1.500 (38.10)	1.500 (38.10)	1.750 (44.45)	0.20 (0.5)	1.7/8 (47.625)	13300	19500	\$1,035.88	
13PHSB16I25TA	(G)	PHSB-16	Izquierda	998 g																\$1,035.88		
13PHSB16L25TA	(G)	PHSB-16	Izquierda	998 g	1.000 (25.40)	1.25 (25.40)	2.750 (69.85)	1.000 (25.40)	1.375 (34.93)	1.269 (139.70)	0.436 (11.07)	4.125 (104.8)	2.125 (53.98)	1.500 (38.10)	1.500 (38.10)	1.750 (44.45)	0.20 (0.5)	1.7/8 (47.625)			\$786.48	
13PHSB16D26TA	(G)	PHSB-16	Derecha	998 g																\$876.96		


Unidad: 1 pieza Master: 1 pieza

Cabeza de rótula con perno LHS

Características:
• Marca: IKO



(mm)

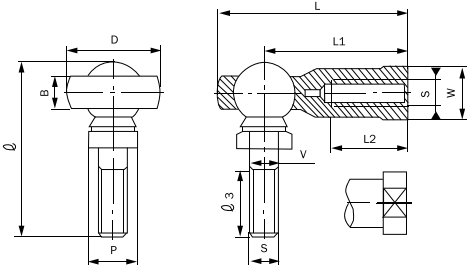

Código	Número	Peso (g)	Rosca	V	D	B	L	Dimensiones					I3	Cap. estática de carga básica (kgf)	Precio
								L1	L2	W	I	P			
13LHS5---IK	LHS-5D	22	M5X0.8	5	17	6	35.5	27	16	9	30.5	8	11	210	\$479.08
13LHS6---IK	LHS-6D (RBL-6D)	32	M6X1	6	19.5	6.75	39.7	30	16	11	36.5	10	14	330	\$484.88
13LHS8---IK	LHS-8D	60	M8X1.25	8	24	9	48	36	19	14	44	11	15	490	\$561.44
13LHS8---TA	LHS-8D (RBL-8D)	62	M8X1	6.9	23.6	9	49	37.5	25.1	13.6	42.2	10	16	490	\$66.12
13LHS10---IK	LHS-10D (RBL-10D)	102	M10X1.5	10	28	10.75	57	43	23	17	52.5	13	18	770	\$675.12
13LHS10---TA	LHS-10	91	M10X1.5	10.3	26.8	10.4	57	40.3	29	16.2	49	13	20	770	\$110.20
13LHS12---IK	LHS-12D	160	M12X1.5	12	32	12	66	50	27	19	61	17	20	1260	\$773.72

Unidad: 1 pieza Master: 1 pieza

Características:
• Marca: GIM

Código	Número	Peso (g)	Rosca	V	D	B	L	Dimensiones					I3	Cap. estática de carga básica (kgf)	Precio
								L1	L2	W	I	P			
13RBL5---TA	RBL-5D (LHS-5)	22	M5X0.8	5	17	7	35.5	27	16	9	30.5	8	11	210	\$52.20
13RBL6---TA	RBL-6D (LHS-6)	32	M6X1	6	19.5	9	39.7	30	16	11	36.5	10	14	330	\$67.28
13RBL8---TA	RBL-8D (LHS-8)	60	M8X1.25	8	24	11	48	36	19	14	44	11	15	490	\$78.88
13RBL10---TA	RBL-10D (LHS-10)	102	M10X1.5	10	28	15	57	43	23	17	52.5	13	18	770	\$88.16
13RBL12---TA	RBL-12D (LHS-12)	160	M12X1.75	12	32	15	66	50	27	19	61	17	20	1260	\$119.48
13RBL14---TA	RBL-14D (LHS-14)	227	M14x2	14	36	18	75	57	30	22	69	17	22	1490	\$163.56

Unidad: 1 pieza Master: 1 pieza

